


CANTO 700 msd/msr MK2

10707180	230V black	11707180	120V black	10707280	250V black
10707181	230V white	11707181	120V white	10707281	250V white
K10707180	230V kit	K11707180	120V kit	K10707280	250V kit



COMPATIBLE LAMPS

Phil ips msr 700/2	G22	7200K	1000hrs
Phil ips msr 700	G22 L	6000K	3000hrs

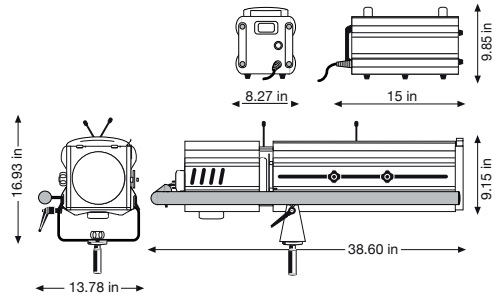

ACCESSORIES

20100106	color frame
20100707	iris diaphragm
20100708	black-out iris diaphragm
20100807	gobo-holder, A/B size
20105106	5-col. color changer, black
20105106B	5-col. color changer, white
20102200	28mm dia spigot
20102401	black followspot tripod
20102402	chrome-plated followspot tripod
20102900	caster-kit for tripod stand
20107080	flight-case with braking wheels
20107070	kit one-hand control iris + dowser
20109106	kit color frame + front runners Canto 120V

PRODUCT SPECS

optical system
double condenser+zoom

reflector
68mm dia. glass

microswitch
double-pole

ballast
external, PFC

color frame
7.25 x 7.25 in

throw
30-125 ft

beam angle
8°-22°

voltage
120V/230V/250V

weight
44 lbs - ballast 62 lbs (120V)

For more power at middle-distance throw this 700W MSD or MSR-powered discharge followspot is the obvious choice. It features a large, user-friendly side handle, strong mechanics and excellent optics. Standard delivery includes an external ballast, iris, mechanical dimmer, spigot, color frame and 6ft main cable.

Seguipersona a doppio condensatore ottico per lampade a scarica 700 MSD o MSR. Eccellente resa ottica per uso intenso su medie distanze. Viene fornito di serie completo di unità ballast esterna, diaframma ad iride, dimmer meccanico, perno per stativo, telaio portagelatina e 2m cavo di alimentazione.

SPECIALS

CANTO 700 KIT includes/comprende

followspot	seguipersona
color changer	cambia colori
black tripod	stativo nero
MSR 700/2 lamp	lampada MSR 700/2
flight case	flight case

PHOTOMETRIC DATA 700 MSD

	ft Ø	6.3	7.0	7.6	8.2	8.9	9.6	10.2	10.9	12
narrow	lux	3.507	2.841	2.348	1.973	1.681	1.449	1.263	1.110	983
	ft	59	65.75	72.25	79	85.4	91	98.5	105	112
	ft Ø	8.6	10.6	12	13.9	15.5	17.4	19	21	22.4
wide	lux	2.727	1.894	1.391	1.065	842	682	563	473	403
	ft	30	39.5	45	52.6	59	66	72.2	79	85.5

